




Zoom Camera



Raspberry Pi Camera Module V3 with case camera

- 12-megapixel Sony IMX708 sensor
- 1080p Video
- 75° or 120° view angle lens

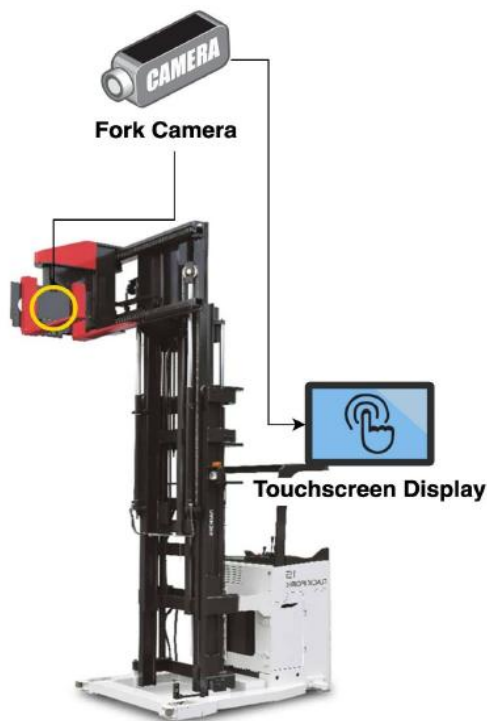

Touchscreen Display with Zoom by finger function



Freenove 5 Inch Touchscreen Monitor with Controller attached on the back of Display

Screen Parameters:

Size: 5 inch
Resolution: 800 x 480 pixel
Refresh rate: 60 Hz
Screen type: IPS
Touch type: 5-point touch capacitive

Forklift
Options



FORK VIEW CAMERA

NICHYU
ELECTRIC FORKLIFT



Camera location



Camera

Camera View



Recorded By
SD Card



Record time
5-7days



Watch the video
By PC application

NICHYU AISA (THAILAND)CO., LTD.



FORK VIEW CAMERA

Fork view camera provides the driver a clear view of the forks offering greater precision in fork alignment when loading/unloading, this is especially useful when loading at height. This greatly reduces unnecessary damage and dangerous loading positions.



Guide Line: Same level as fork surface